

SPECIFICATIONS			
	DCM1010	DCM1212	DCM1315
Amplifier Type	Class AB	Class AB	Class D
Amplifier Power	130 Watts	130 Watts	230 Watts
Frequency response	33-120Hz	27-120Hz	27-120Hz
Inputs	Line level High level	Line level High level	Line level Line level
Outputs	Line level High level	Line level High level	Line level High level
Hi pass subsonic filter	18dB@20Hz	18dB@20Hz	18dB@20Hz
Polarity switch	0°/180°	0°/180°	0°/180°
Driver/Passive Radiator	10"	12"	15"
Dimensions			
Height	16"	17"	18.5"
Width	15.5"	15.5"	20.5"
Depth	9"	9"	12.5"
Weight			
Unit	33 lbs.	40 lbs.	55 lbs.
Shipping	38.5 lbs.	45.5 lbs.	58.5 lbs.

Specifications subject to change without notice.



File Name: Dcm Sub 2 Manual.pdf

Size: 3465 KB

Type: PDF, ePub, eBook

Category: Book

Uploaded: 27 May 2019, 15:28 PM

Rating: 4.6/5 from 814 votes.

Status: AVAILABLE

Last checked: 10 Minutes ago!

In order to read or download Dcm Sub 2 Manual ebook, you need to create a FREE account.

[Download Now!](#)

eBook includes PDF, ePub and Kindle version

[Register a free 1 month Trial Account.](#)

[Download as many books as you like \(Personal use\)](#)

[Cancel the membership at any time if not satisfied.](#)

[Join Over 80000 Happy Readers](#)

Book Descriptions:

We have made it easy for you to find a PDF Ebooks without any digging. And by having access to our ebooks online or by storing it on your computer, you have convenient answers with Dcm Sub 2 Manual . To get started finding Dcm Sub 2 Manual , you are right to find our website which has a comprehensive collection of manuals listed.

Our library is the biggest of these that have literally hundreds of thousands of different products represented.



Book Descriptions:

Dcm Sub 2 Manual






Please check your inbox, and if you can't find it, check your spam folder to make sure it didn't end up there. Please also check your spam folder. Please take the time to read this manual for the best. Please keep this manual for future reference. The present home appliance is certified and approved by. Information in this manual is subject to change without prior notice. Safety Instructions. Ver 1.10NE. To reduce the risk of fire, electrical shock and other injuries, keep these safety instructions. The socket outlet shall be installed near the equipment and shall be easily accessible. A Warning that an apparatus with class I constructions shall be connected to a Warning. If you manipulate against the notice, it may cause serious injury or Caution. If you manipulate against the notice, it may cause slight injury to. To preserve the Environment do not rubbish. Warning. Disconnect the power cable and signal cable connected to the product in. Do not attempt to touch its power cord with wet hands. If any electric pin is wet or dusty, remove the moisture or dust first before use. Install the outdoor antenna for the set far away from high voltage cables. It is recommended to pull out the power cord unless you use it for a long time. When moving it, do not apply any forces on the set. Damaged power cord, plug or unfitted outlet may be very dangerous. Do not attempt to disassemble, repair or change the product. Whenever you need to repair, adjust or check it, refer servicing to qualified personnel. Do not install the set close to any heating sources. Do not directly spray water or rub it with inflammable substances thinner. Do not place heavy articles on it or step on the product. The product should be installed on a clean and dry place. When cleaning the LCD surface, disconnect the power and use a piece of cloth. Never use wet cloth. When you detect any smog, unusual noise or smell, just disconnect the power. Caution. <http://chelabrandon.com/admin/fck/copc-reference-manual.xml>

- dcm sub 2 manual.

Legal information

Warning notice system

This manual contains information which you must observe to ensure your own personal safety as well as to avoid material damage. The notices referring to your personal safety are highlighted in the manual by a safety alert symbol, notices referring only to equipment damage have no safety alert symbol. Depending on the hazard level, warnings are indicated in a descending order as follows:

 DANGER
Indicates that death or serious injury will result if proper precautions are not taken.
 WARNING
Indicates that death or serious injury could result if proper precautions are not taken.
 CAUTION
Indicates that minor personal injury can result if proper precautions are not taken.
NOTICE
Indicates that property damage can result if proper precautions are not taken.


If more than one level of danger is simultaneously applicable, the warning notice for the highest level is used. A notice warning of injury to persons with a safety alert symbol may also include a warning relating to property damage.

Qualified personnel

The product/system described in this documentation may only be operated by **personnel qualified** for the specific task in accordance with the relevant documentation for the specific task, in particular its warning notices and safety instructions. Qualified personnel are those who, based on their training and experience, are capable of identifying risks and avoiding potential hazards when working with these products/systems.

Proper use of Siemens products

Note the following:

 WARNING
Siemens products are only permitted to be used for the applications listed in the catalog and in the associated technical documentation. If third-party products and components are used, then they must be recommended or approved by Siemens. These products can only function correctly and safely if they are transported, stored, set up, mounted, installed, commissioned, operated and maintained correctly. The permissible ambient conditions must be adhered to. Notes in the relevant documentation must be observed.

Trademarks

All names identified with ® are registered trademarks of Siemens AG. Any other names used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

Disclaimer of liability


We have checked the contents of this publication for consistency with the hardware and software described. Since variance cannot be precluded entirely, we cannot guarantee full consistency. The information given in this document is reviewed at regular intervals and any corrections that might be necessary are made in the subsequent editions.

Make sure to pull out the power cord when cleaning or removing theDo not place any bowl with water, beverage, can or other liquid productsDo not use or place any combustible sprayer or inflammable substancesVentilation should be always open and the set should be installed in aDo not install the set in a place directly exposed to sunlight.Operating Temperature. Storage Temperature. Operating Humidity. Storage HumidityThis is not from bad quality or functionalWhen used as a PC monitor;Using PC MENUPlease make sure the following items are included with your LCD TV. If any items are missing, contact your dealer. AAAtype battery 2RF Cable. Power Cord. DC Adaptor. Channel Button. Sound Cont. Remote Control SensorExit Menu. Load Menu. User's Manual. Power button is jog shuttle type button and it operates different functions by pushing it toCOMPONENT HDTV Video Input Pb Y Pr. COMPONENT HDTV Audio Input L R. Power Input. Vodeo Input. PC Input. SVodeo Input. COMPONENT DVD Video Input. AV Input L R. COMPONENT DVD Audio Input. Upgrade Input. TV Antenna InputFunctions by remote control buttons. Button. Function. Button. FunctionNumeric Buttons. Select channels over 100. Move TV ChannelsControl Volume. Sound off Temporarily. Input Source selection Botton PC SVideo Video Full SCART TV Half SCART. Channel Selection ButtonControl Sound modeControl Picture Mode. Choose Stereo, Mono or Secondary Audio Program SAP broadcastMenu Control ButtonNot available. Not available. Not availableNot availableMost functions of the TV set can be controlled by MENU and selection buttons on thePressMain Menu. Sub Menu. SettingsPressPushPush it right again to display sub menu. PushPush it left again to clear menu. ConnectionPush the button up and down to move among menus. If pushing it upward when menu is not displayed, it controlsIf pushing it downward when menu is not display, it changes inputRemove the cover of the remote control. Check the polarity of batteries and insert them in right directions.<http://aceglobalventures.com/fck/copam-cp-2500-user-manual.xml>




You can select a sound setting among,, Depending on the particular program being broadcast, you can listen to stereo, mono, Sometimes SAP has unrelated information like news or weather.. Press the Each press of the Stereo Choose Stereo for channels that are broadcasting in stereo. Mono Choose Mono for channels that are broadcasting in mono, or if you are having SAP Choose SAP to listen to the Secondary Audio Program, which is usually a When using the TV first after purchase, reconnecting it due to power failure or other Since Channel Search function searches channels currently broadcasted, you should Please choose your TV input type by selecting either Air or Cable. In case of channels frequently watch, you can switch it to other channel numbers and This function deals with MPAA rating of TV broadcast and other media. It works only with VChip function broadcast and media. This function works only with caption broadcast or other CC marked video tape and. DVD title. Default VChip PIN is 0000. Set the function in the SETUP menu. Please change PIN as yours when you install. Caption can be set only by using the remote control. Using Menus of Picture. Sound and Others You can set the screen's suitable image scale of TV or Video input signals and view Standard Standard picture mode. Soft It displays a picture softly as a whole and is better for watching a Dynamic The mode is suitable for watching sports, which changes pictures fast. User It is a picture mode customized by a user. Full Show a screen in the full LCD Panel. You can set sound

suitable for TV broadcasting or Video. Standard sound mode. Music Music broadcasting mode. Movie Cinema broadcasting mode. News News broadcasting mode. User User's customization mode. Also, it can be set in OSD menu if JOG button is used. USER mode can be set only in OSD menu. Setting Option Using PC MENU sleep Timer Menu Language Change a language to display OSD. Factory Reset Reset all the OSD control settings back to the factory setting status.

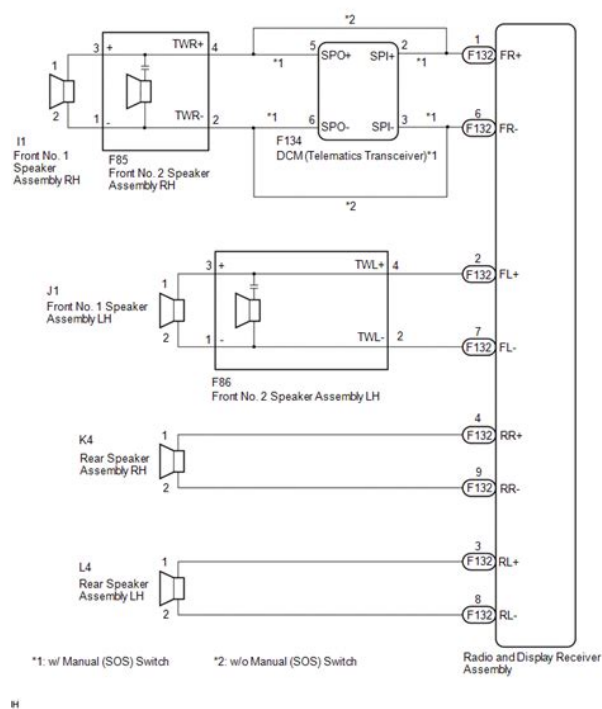

<http://stroyzona.com.ua/companynews/dsc-5500-keypad-manual>

Version It shows the product version. In case of using it as a PC monitor, it is automatically set. In case it is not optimally set even though automatically adjusting it, use Picture menu. When the set is connected to a PC, the MODE should be set as PC RGB Mode. Phase function. When being used as a PC Monitor, the scale can be adjusted. You can set sound suitable on PC mode. PC Monitor Scale works only when PC signal is connected and input signals are Full Display picture in the full screen regardless of the resolution. Standard sound mode. Music Music broadcasting mode. Movie Cinema broadcasting mode. News News broadcasting mode. User User's customization mode. Also, it can be set in OSD menu if JOG button is used. USER mode can be set only in OSD menu. Setting Option Setting Color Temperature. You can set screen color temperature on PC mode. Sleep Timer Menu Language Change a language to display OSD. Factory Reset Reset all the OSD control settings back to the factory setting status. Version It shows the product version. Dimensions, apparent design and specifications are subject to change without any prior Product Name Type. Amorphous Silicon TFT LCD. Size Resolution Pixel Pitch Contrast Ratio Brightness. Actual Display Size Viewing Angle. Interface PC Monitor Power. Power Consumption. Energy Saving Mode. Horizontal Frequency. Vertical Frequency. Colors Max. Resolution. WXGA 1,280 H x 768 V. Adaptor Input. Adaptor Output PDF Version 1.4. Linearized No. Create Date 20050930 163047Z. Page Count 29. About uuid991e7eda379d4efea150ea9b1eb21142. Producer Acrobat Distiller 4.0 for Macintosh. Creation Date 20050930 163047Z. Creator Tool QuarkXPress 3.3k Adobe PS 8.5.1. Document ID uuid01812bba35447cd8aa4695231dee9ef. Page 3 FEDERAL COMMUNICATIONS COMMISSION FCC INFORMATION Page 4 Introduction Page 5 System Concepts Page 7 Illustrations Rear Panels This provides the projectionist.

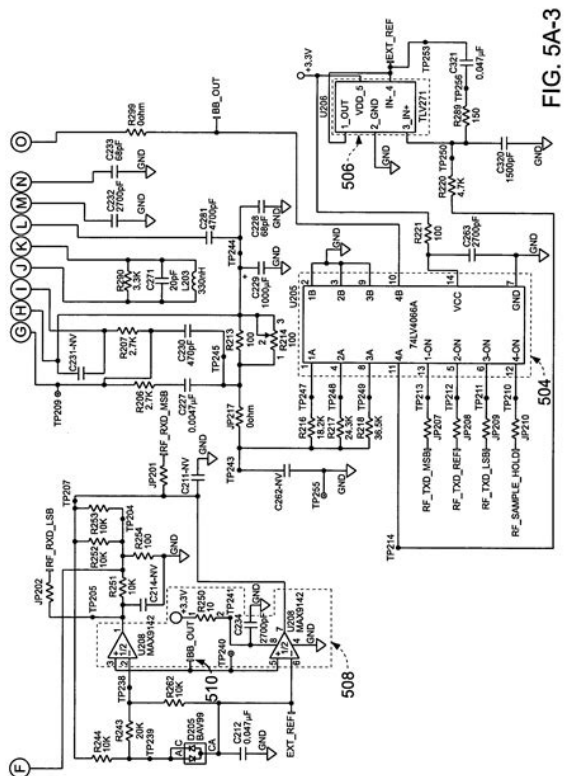

Page 9 Hardware Description continuedPage 10 Hardware Description continuedPage 12 MountingPage 13 Software DescriptionPage 14 ConnectionsJust make sure that you have all of the correct. Page 15 Connections continuedRefer to the. Page 20 TroubleshootingPage 21 Troubleshooting continuedDCM Inputs, Main Analog, Surround EXHearing Impaired OutputMailing address QSC Audio Products, Inc. Get news, info, tips and offers straight to your inbox. Sign up you know you want to. Choose your country below to get started. Ramon Rivero y Av. Oquendo Recoleta Edificio Cine Center Local Sky Games Cochabamba Bolivia TEL Parque Industrial Naucalpan CP 53480 Estado de Mexico Mexico TEL Rogelio Cantu 370 Col.Biharia 6777, Sector 1, Metav Business Park, Building C Bucharest TEL Malaysia TEL Economia Sts. Libis, Quezon City, Philippines. No 5034 5D ASH SHERA, Unit No 1 Alazizyah, Alkobar 347426965 Saudi Arabia TEL AB1408 Jebel Ali, Dubai.



<http://acetuitioncentre.com.au/wp-content/plugins/formcraft/file-upload/server/content/files/1628d41007de96---Cardo-scala-rider-owner-s-manual.pdf>

<https://www.airyachtnboat.com/en/article/dsc-5132-installation-manual>